


Eaton's AL series dimmers

# Wallbox lighting controls

**EATON**

*Powering Business Worldwide*

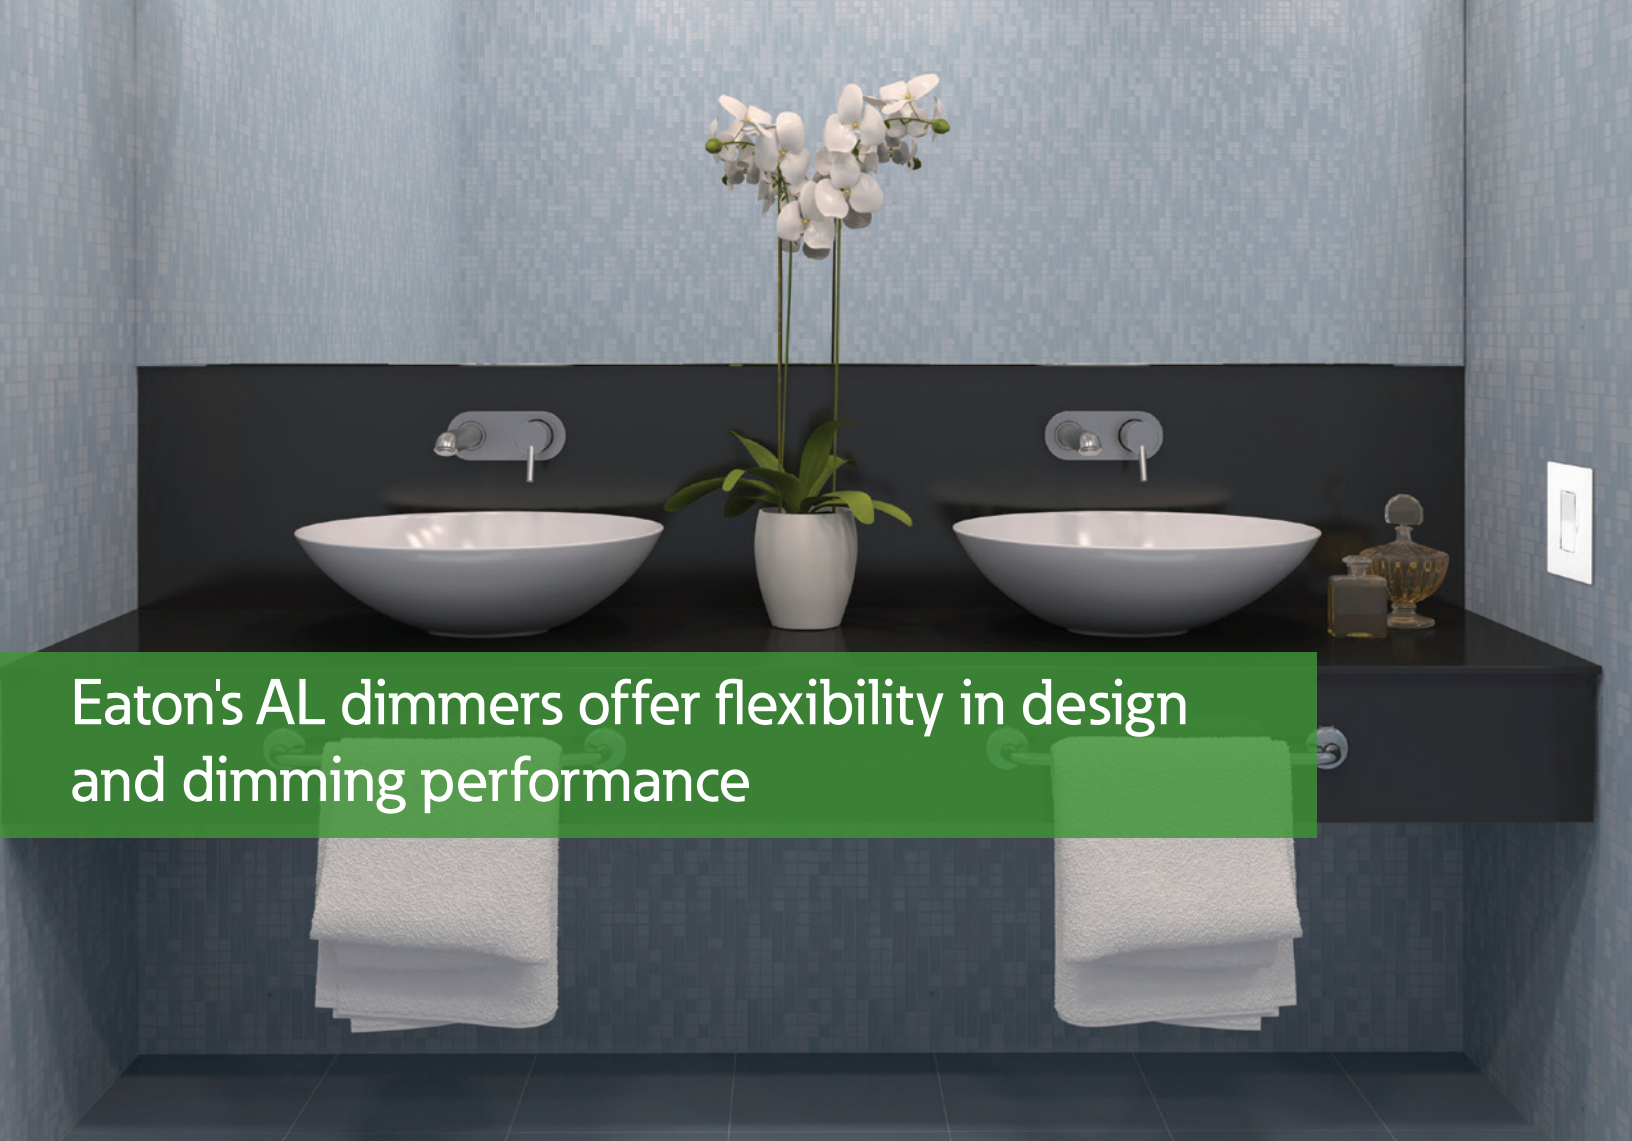

# Eaton's AL dimmers offer flexibility in design and dimming performance

## Flexibility & innovation

Eaton's Wiring Devices' AL Series Dimmers offer a versatile option for any dimming application - fine tune the dimming performance to match your exact needs and change colors as needed to suit any décor.

## Color flexibility

Color change kits come with three color faceplates, offering design flexibility within one product. Select models are available in 4 different color combination packs.



- Single-pole or 3-way wiring in one unit
- Separate ON/OFF and DIM/BRIGHT controls allow easy return to favorite light levels
- Interchangeable faceplates available in 4 different color change kit options



A	W	V
---	---	---

**C1 Color Kit**  
Almond, White, Ivory

LA	W	V
----	---	---

**C2 Color Kit**  
Light Almond, White, Ivory

BK	W	V
----	---	---

**C4 Color Kit**  
Black, White, Ivory

BK	W	GY
----	---	----

**C5 Color Kit**  
Black, White, Gray









## AL series dimmers provide rating flexibility

Enjoy flexibility and optimal dimming performance with a variety of light sources and functionality

Dimmer Features	Accell (AAL06)	Devine (DAL06P)	Skye (SAL06P)	Trace (TAL06P)
Rapid start feature	Selectable ON or OFF	Fully adjustable	Fixed ON	Fully adjustable
Adjustable high-end trim	•			
Adjustable low-end trim	•	•	•	•
Wiring configurations	Single-pole or multi-location	Single-pole or 3-way	Single-pole or 3-way	Single-pole or 3-way
Color change kits	•	•		•

### Rated for all common lighting loads

-  Dimmable Compact Fluorescent (CFL)
-  Dimmable Light-Emitting Diodes (LED)
-  Electronic Low-Voltage (ELV)
-  Magnetic Low-Voltage (MLV)
-  Incandescent/Halogen (INC/HAL)
-  Fluorescent (FLR)



# AL series dimmers



## Single-pole and multi-location

- Green LEDs indicate light level and preset
- Separate DIM/BRIGHT bar can be used to adjust preset level when lights are ON or OFF
- Air gap switch allows for manual disconnect during lamp changes

## Color change faceplate options



## Accell AL series smart dimmers



AAL06  
PJS26W Wallplate  
(sold separately)

### Features

- Electro-mechanical push pad for ON/OFF operation with separate DIM/BRIGHT bar
- 10-second delayed OFF feature
- Selectable Rapid Start feature to ensure lamp start-up at low preset light levels
- LED light level display for presetting illumination levels and master/accessory units for multi-location control
- Adjustable upper and lower dimming range
- No de-rating required for CFL/LED in multi-gang installations
- Each color kit package includes 3 colors

### Smart dimmers, wire leads

Rating W	V/AC	Compatible Lamp Types	Description	Color Suffix	Catalog No.
300	120	Dimmable LED/CFL	Smart dimmer master, AL series, Single-pole/multi-location with presets and LEDs. Neutral required.	C1, C2, C4, C5	□ AAL06-___
600	120	INC, HAL, FLR, MLV, ELV			
—	120	—	Accessory dimmer, multi-location with presets and LEDs. Must be used with AAL06	A, B, BK, GY, LA, V, W, C1, C2	□ ARD-___
—	—	—	Master dimmer color change faceplate	A, B, BK, GY, LA, V, W	□ AMC-___-BP
—	—	—	Accessory dimmer color change faceplate	A, B, BK, GY, LA, V, W	□ ARC-___-BP

See instruction sheet for de-rating information

### Color ordering information

For ordering devices, include Cat. No. followed by the color code: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), C1 (Color Change Kit - Almond, White, Ivory), C2 (Color Change Kit - Light Almond, White, Ivory), C4 (Color Change Kit - Black, Ivory, White), C5 (Color Change Kit - Black, Gray, White)

A (Almond)	B (Brown)	BK (Black)	GY (Gray)	LA (Lt. Almond)	V (Ivory)	W (White)					
A	W	V	LA	W	V	BK	W	V	BK	W	GY
<b>C1 Color Kit</b> Almond, White, Ivory			<b>C2 Color Kit</b> Light Almond, White, Ivory			<b>C4 Color Kit</b> Black, White, Ivory			<b>C5 Color Kit</b> Black, White, Gray		

**Testing & code compliance** cULus Listed to UL1472 file no. E47967 NOM Certified. Material characteristics environmental: Flammability meets UL 94 requirements; V2 rated Temperature Rating: 0°C to 40°C (32°F to 104°F)  
**Specifications and availability subject to change without notice.**



# AL series dimmers



## Single-pole and 3-way

- Separate DIM/BRIGHT bars allows lights to be returned to favorite settings
- Adjustable low-end dim setting improves lamp compatibility
- Fully adjustable Rapid Start ensures the right amount of power boost during start-up

## Color change faceplate options



## Devine AL series dimmers

### Features

- Preset feature allows user to return to previous light level when turning lights ON
- Adjustable low-end dimming range
- Fully adjustable Rapid Start setting for optimal lamp start-up at low preset light levels
- No de-rating required in multi-gang installations
- Each color kit package includes 3 colors



DAL06P  
PJS26W Wallplate  
(sold separately)


### Decorator dimmers, back & side wire

Rating W	Compatible V/AC	Compatible Lamp Types	Description	Color Suffix	Catalog No.
300	120	Dimmable LED/CFL	Decorator dimmer, Single-pole/3-way preset	C1, C2, C4, C5	<input type="checkbox"/> DAL06P-__
600	120	INC, HAL, FLR, MLV, ELV			
—	—	—	DAL06P Color change faceplate	A, BK, GY, LA, V, W	<input type="checkbox"/> DCK1-__

See instruction sheet for de-rating information

### Color ordering information

For ordering devices, include Cat. No. followed by the color code: A (Almond), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), C1 (Color Change Kit - Almond, White, Ivory), C2 (Color Change Kit - Light Almond, White, Ivory), C4 (Color Change Kit - Black, Ivory, White), C5 (Color Change Kit - Black, Gray, White)

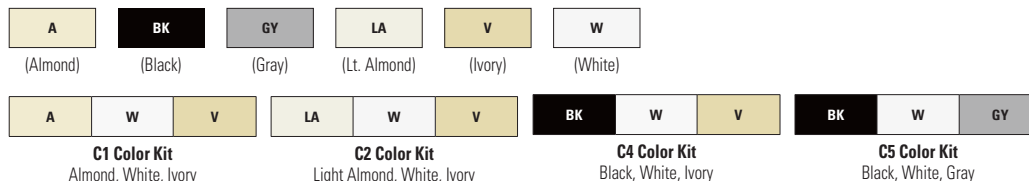

**Testing & code compliance** cULus Listed to UL1472 file no. E47967 NOM Certified. Material characteristics environmental: Flammability meets UL 94 requirements; V2 rated Temperature Rating: 0°C to 40°C (32°F to 104°F)  
**Specifications and availability subject to change without notice.**



# AL series dimmers



## Single-pole and 3-way

- Adjustable low-end dim setting improves lamp compatibility
- Separate DIM/BRIGHT slider allows lights to be returned to favorite setting
- Green LED locator light glows softly when lights are OFF
- Large ON/OFF switch makes turning lights ON and OFF easy

## Skye AL series dimmers

### Features

- Preset feature allows user to return to previous light level when turning lights ON
- Adjustable low-end dimming range
- Fixed Rapid Start provides quick power burst to ensure lights start even at low preset light levels
- No de-rating required in multi-gang installations



SAL06P-W  
PJS26W Wallplate  
(sold separately)


### Slide dimmers, back & side wire

Rating W	Rating V/AC	Compatible Lamp Types	Description	Color Suffix	Catalog No.
300	120	Dimmable LED/CFL	Slide dimmer, Single-pole/3-way preset	A, BK, GY, LA, V, W	□ SAL06P-__
600	120	INC, HAL, FLR, MLV, ELV			

See instruction sheet for de-rating information

### Color ordering information

For ordering devices, include Cat. No. followed by the color code: A (Almond), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White)



**Testing & code compliance** cULus Listed to UL1472 file no. E47967 NOM Certified. Material characteristics environmental: Flammability meets UL 94 requirements; V2 rated Temperature Rating: 0°C to 40°C (32°F to 104°F)  
**Specifications and availability subject to change without notice.**



# AL series dimmers



## Single-pole and 3-way

- Green LED locator light glows softly when lights are OFF
- Adjustable low-end dim setting improves lamp compatibility
- Separate DIM/BRIGHT bars allows lights to be returned to favorite settings
- Fully adjustable Rapid Start ensures the right amount of power boost during start-up

## Color change faceplate options



## Trace AL series dimmers

### Features

- Preset feature allows user to return to previous light level when turning lights ON
- Adjustable low-end dimming range
- Fully adjustable Rapid Start setting for optimal lamp start-up at low preset light levels
- No de-rating required in multi-gang installations
- Each color kit package includes 3 colors



TAL06P  
PJS26W Wallplate  
(sold separately)


### Toggle dimmers, back & side wire

Rating W	Compatible V/AC	Lamp Types	Description	Color Suffix	Catalog No.
300	120	Dimmable LED/CFL	Toggle dimmer, Single-pole/3-way preset	C1, C2, C4, C5	□ TAL06P-__
600	120	INC, HAL, FLR, MLV, ELV			
—	—	—	TAL06P Color change faceplate	A, BK, GY, LA, V, W	□ TCK1-__

See instruction sheet for de-rating information

### Color ordering information

For ordering devices, include Cat. No. followed by the color code: A (Almond), BK (Black), GY (Gray), LA (Light Almond), V (Ivory), W (White), C1 (Color Change Kit - Almond, White, Ivory), C2 (Color Change Kit - Light Almond, White, Ivory), C4 (Color Change Kit - Black, Ivory, White), C5 (Color Change Kit - Black, Gray, White)

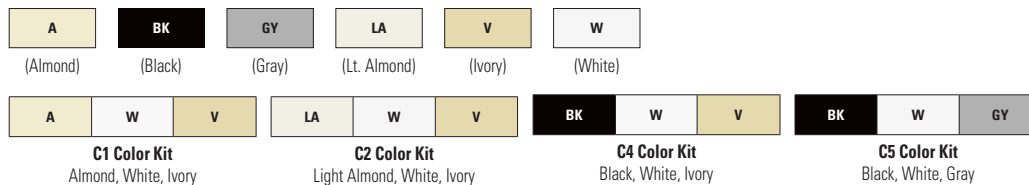

**Testing & code compliance** cULus Listed to UL1472 file no. E47967 NOM Certified. Material characteristics environmental: Flammability meets UL 94 requirements; V2 rated Temperature Rating: 0°C to 40°C (32°F to 104°F)  
**Specifications and availability subject to change without notice.**



Visit our website:  
[www.Cooperwiringdevices.com](http://www.Cooperwiringdevices.com)

Electrical Sector  
203 Cooper Circle  
Peachtree City, GA 30269  
United States  
Eaton.com  
Cooperwiringdevices.com

Electrical Sector  
Canada Operations  
5925 McLaughlin Road  
Mississauga, Ontario, L5R 1B8  
Canada  
EatonCanada.ca  
Cooperwiringdevices.com

Electrical Sector  
Mexico Operations  
Carr. Tlalnepantla -  
Cuautitlan Km 17.8 s/n  
Col. Villa Jardin esq.  
Cerrada 8 de Mayo  
Cuautitlan, Mexico CP 54800  
Mexico  
Eaton.mx  
Cooperwiringdevices.com

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
Eaton.com

© 2014 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. E225-0054-14  
March 2014

Eaton is a registered trademark.  
All other trademarks are property  
of their respective owners.

